


DIMENSIONS	mm	
(A) 1/2"	13	TO
6"	152	
(B) 3"	76	

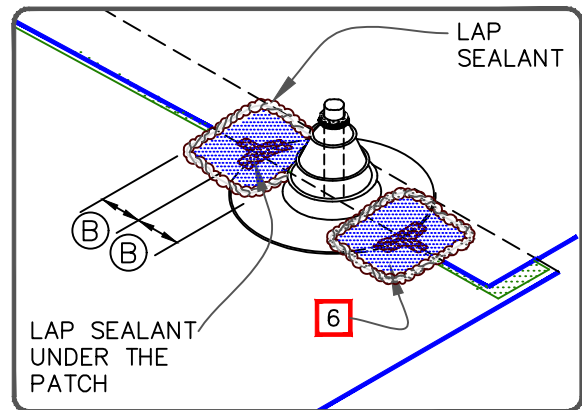

NOTES:

1. PRE-MOLDED PIPE FLASHING MUST HAVE INTACT RIB AT THE TOP EDGE REGARDLESS OF PIPE DIAMETER.
2. EPDM PRIMER MUST BE APPLIED TO MEMBRANE SURFACE PRIOR TO APPLYING PRESSURE-SENSITIVE PIPE SEAL.
3. FLANGES OF THE PRESSURE-SENSITIVE PIPE SEAL SHALL NOT BE OVERLAPPED, CUT OR APPLIED OVER ANY ANGLE CHANGE.
4. WHEN A FIELD SPLICE INTERSECTS A PIPE SEAL, APPLY LAP SEALANT ALONG THE EDGE OF THE MEMBRANE SPLICE COVERING THE EXPOSED SPLICE TAPE 1/2" (13mm) IN EACH DIRECTION FROM THE SPLICE INTERSECTION & OVERLAY WITH A 6"x6" (152mm X 152mm) T-JOINT COVER.
5. REMOVE RUST, OIL, GREASE OR ANY FOREIGN MATERIAL WHICH WILL AFFECT THE SEAL.
6. ENSURE, PIPE IS ANCHORED INTO STRUCTURAL MEMBER FOR STABILITY.

GEOMEMBRANE & LINER ARE INTERCHANGEABLE TERMS

GeoTough EPDM MEMBRANE

NON-WOVEN GEOTEXTILE, MIN. 8 oz. MIN. /SY

	PRE-MOLDED PRESSURE-SENSITIVE PIPE SEAL FOR ONE INCH TO 6" DIAMETER		SHEET NO.
			L-E8.1
1 SEE NOTE(S)			• L (LINER) • TL (TANK LINER)