


NOTES:

1. APPLY ON HARD SMOOTH SURFACE ONLY; NOT FOR USE ON EXPOSED WOOD.
2. DO NOT BEND/WRAP TERMINATION BAR AROUND CORNERS.
3. INSTALL BAR ABOVE THE MAXIMUM DESIGNED ELEVATION OF WATER SURFACE.
4. OWNER MUST MAINTAIN THE WATERPROOFING INTEGRITY OF SUBSTRATE BELOW AND ABOVE THE LINER AREA.
5. IN AREAS, WHERE MEMBRANE FLASHING ENDS AND VERTICAL SIDES ARE EXPOSED, THERE INSTALL TERMINATION BAR ALSO AND SEAL THE EDGES WITH LAP SEALANT.

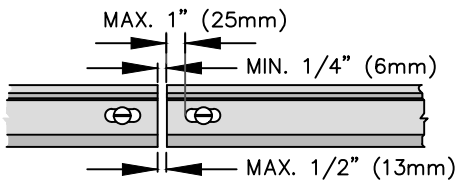

GEOMEMBRANE & LINER ARE INTERCHANGEABLE TERMS

— GeoTough EPDM MEMBRANE

--- NON-WOVEN GEOTEXTILE, MIN. 8 oz. MIN. /SY

	MECHANICAL TERMINATION WITH TERMINATION BAR		SHEET NO.
			L-E9.1
1 SEE NOTE(S)			• L (LINER) • TL (TANK LINER)